

ACE-TS

# One brewer...

Newco introduces a Telescoping Brewer that  
adjusts to fit your Dispenser.

# ...One solution



Adjust it up for tall dispensers  
Maximum Height of brewer: 26 1/2"  
Maximum Height of dispenser: 22 1/2"



Newco's  
Telescoping  
Brewer is  
adjustable in  
12 one inch  
increments.

Adjust it down for short dispensers

Min. Height of brewer: 18 3/4"  
Min. height of dispenser: 10 1/2"


## Dispenser Options



\* Contact Customer Service for additional color, sizes and private labeling.

# ACE-TS Telescoping Brewer

- Ready light indicates optimum brew temperature
- Flashing brew light alerts user that coffee is brewing
- Universal base for perfect dispenser alignment
- Gravity fed hot water faucet for tea, soups and hot coco
- Tank "ON/OFF" switch for easy installation
- Pulse brewing option - when turned "on" allows pulsation of water over coffee grounds of coffee
- Auto arm capable. When activated locks out brew cycle until optimum temperature is achieved
- PDS Valve. The most accurate flow control on the market, eliminating service calls due to inconsistent pot levels
- Four configurations in one brewer: TD Model, AP Model, LD Model, & TC Model.

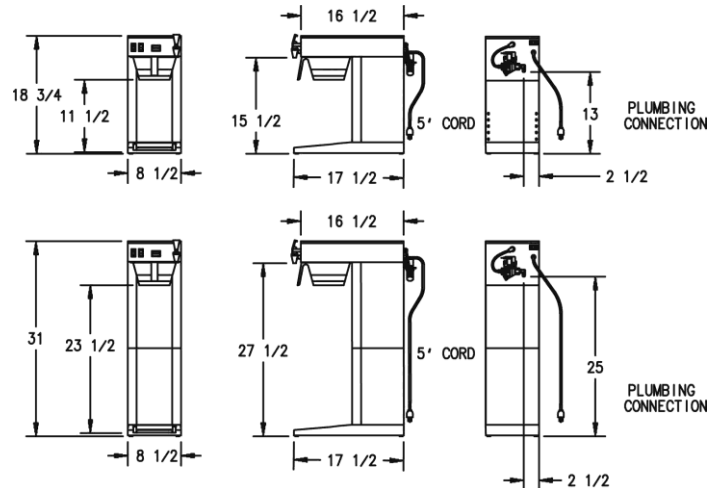

**LD CONFIGURATION:**

- Brews Into The 2.54 Newco Server Without Base.
- Brews Into The 1.9L Up To 5.0L ShurizJo Thermal Servers Without Base.
- Brews Into The 2.0L ShurizJo Airpot.

**TC CONFIGURATION:**

- Brews Only Into The 1.9L Vaculator S/S Thermal Server - Tall.

**TD CONFIGURATION:**

- Brews Into The 2.5L Newco Server With Regular Base.
- Brews Into The 1.9L & 2.5L ShurizJo Thermal Servers With Regular Base.
- Brews Into The 3.8L & 5.0L ShurizJo Thermal Servers Without Base.

**AP CONFIGURATION:**

- Brews Into The 2.0L Up To 2.5L E-Air Airpots.
- Brews Into The 1.9L Up To 3.0L Peacock Airpots.
- Brews Into The 2.0L Up To 3.5L ShurizJo Airpots.
- Brews Into The 2.2L Vaculator Airpots.



	Base Model	Control Option	Part Number	Volts	Amps	Tank* Wattage	Cubic Feet	Ship Weight	Cord Attached
USA	Ace-TS w/PDS	Telescoping	120780-USA	120	15	1750	9.8	34	Yes
C inada	Ace-TS w/PDS	Telescoping	120780-CAN	120	15	1400	9.8	34	Yes

\*Cord not included on 240v models. Available for purchase. Contact Customer Service.

**Electrical:** 120V models are 2 wires plus ground service rated 120V, single phase, 60Hz. 120/240 V models are 3 wires plus ground service rated 120/240 V, single phase, 60Hz

**Plumbing:** Water line should be 20-90 PSI and have a minimum flow rate of 1.5 GPM. Mechanical connection on brewer is 1/4" male flare connector.